

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 25/50, BPR 25/50 D



Robust and reliable
Best component protection




Precise and save to operate
BOMAG single lever control



Simple and safe transport
Transport wheels (optional)

Shipping dimensions in m3

BPR 25/50 0,482
BPR 25/50 D 0,540

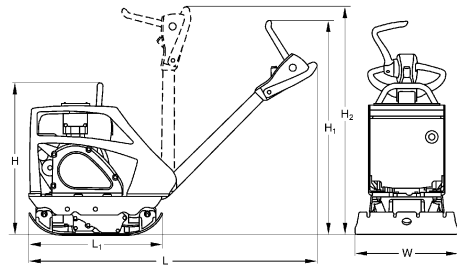

Standard Equipment

- Protective engine covering
- Single lever control
- Low vibration steering rod
- Height adjustable steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Fully protected V-belt
- Automatic decompression
- Recoil starter
- Back-up drive protection
- 3-2-1 Warranty

Optional Equipment

- Sprinkler system (+13kg)
- Transport wheels, puncture-proof (+4kg)
- Tool kit
- Special painting
- Plastic mat
- Service Kit
- TOUGH WARRANTY

Dimensions in mm

	H	H1	H2	L	L1	W
BPR 25/50	660	870	1220	1460	650	500
BPR 25/50 D	740	870	1220	1460	650	500

Technical Data

Weights

Operating weight CECE (W)	kg	140	155
Basic weight	kg	137	152

Dimensions

Basic working width	mm	500	500
Lowest passing height	mm	660	740
Min. height w. steering in top position	mm	870	870
Max. height w. steering in top position	mm	1.200	1.200

Driving Characteristics

Working speed, max.	m/min	25	25
Max. gradeability (dep. on soil con.)	%	30	30

Drive

		BOMAG BPR 25/50	BOMAG BPR 25/50 D
Engine manufacturer		Honda	Hatz
Type		GX 160	1B20
Emission stage		CARB Phase III	non EPA
Cooling		air	air
Number of cylinders		1	1
Performance ISO 3046	kW	3,6	3,1
Speed	min-1	3.600	3.000
Drive system		mech.	mech.
Fuel		gasoline	diesel
Fuel consump. aver. during operation	l/h	1,1	0,7

Exciter system

Frequency	Hz	85	85
Centrifugal force	kN	25	25
Amplitude	mm	1,31	1,31

Capacities

Fuel	l	3,0	3,0
Water	l	12,0	12,0

Technical modifications reserved. Machines may be shown with options.



PRE 692 52 010

130217 Sa01

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

