

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 45/55 D, BPR 50/55 D



Maximum longevity

Full protection hood - engine and components protected all around



Precise and save to operate

Comfortable control lever




Higher quality, lower costs

ECONOMIZER - The compaction display (optional)

Shipping dimensions in m3

BPR 45/55 D 0,739
BPR 50/55 D 0,739

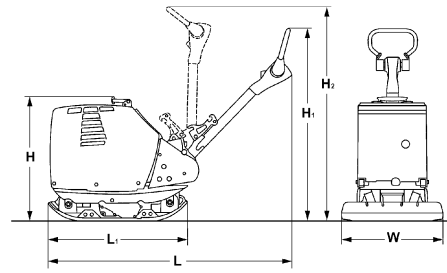

Standard Equipment

- Engine protection hood
- Comfortable control lever
- Low vibration steering rod
- Height adjustable steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Automatic decompression
- Multi-functional, foldable single-point lifting facility
- Extension plates (550mm)
- Electric starter
- Recoil starter
- Back-up drive protection
- Warning signal at low oil level (BPR45/55D)
- 3-2-1 Warranty
- Hour meter

Optional Equipment

- ECONOMIZER (+5kg)
- Tool kit
- Special painting
- Plastic mat
- Extension plates (650/750mm)
- Service Kit
- US Version EPA 4 NRTC (BPR45:6,2kW; BPR50:6,8kW)
- TOUGH WARRANTY

Dimensions in mm

	H	H1	H2	L	L1	W	W1	W2
BPR 45/55 D	790	980	1350	1700	900	450	550	750
BPR 50/55 D	790	980	1350	1700	900	450	550	750

Technical Data

Weights

	kg	BOMAG BPR 45/55 D	BOMAG BPR 50/55 D
Operating weight CECE (W)	385	385	390
Operating weight CECE (W1)	400	400	405
Operating weight CECE (W2)	415	415	420
Basic weight	395	395	400

Dimensions

	mm	BOMAG BPR 45/55 D	BOMAG BPR 50/55 D
Basic working width	550	550	550
Working width without extension bars (W)	450	450	450
Lowest passing height	790	790	790
Min. height w. steering in top position	980	980	980
Max. height w. steering in top position	1.220	1.220	1.220

Driving Characteristics

	m/min	BOMAG BPR 45/55 D	BOMAG BPR 50/55 D
Working speed, max.	28	28	28
Max. gradeability (dep. on soil con.)	35	35	35

Drive

		BOMAG BPR 45/55 D	BOMAG BPR 50/55 D
Engine manufacturer		Lombardini	Hatz
Type		15 LD 440	1B 40
Emission stage		non EPA	non EPA
Cooling		air	air
Number of cylinders		1	1
Performance ISO 3046	kW	6,8	6,7
Speed	min-1	3.000	3.000
Drive system		mech. diesel	mech. diesel
Fuel		1,4	1,5
Fuel comsump. aver. during operation	l/h	1,4	1,5

Exciter system

	Hz	BOMAG BPR 45/55 D	BOMAG BPR 50/55 D
Frequency	70	70	66
Centrifugal force	kN	45	50
Amplitude	mm	1,55	1,85

Capacities

	l	BOMAG BPR 45/55 D	BOMAG BPR 50/55 D
Fuel	5,0	5,0	5,0

Technical modifications reserved. Machines may be shown with options.



PRE 692 59 010

060317 Sa01

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

