

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPH 80/65 S



Maximum longevity

Full protection hood - engine and components protected all around



Safe operation

Radio/cable remote control or cable remote control




More transparency

Integrated diagnostic module with fault code display

Shipping dimensions in m3

BPH 80/65 S

0,702

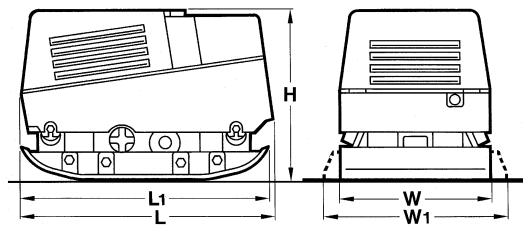

Standard Equipment

- Hydrostatic drive
- Cable remote control
- Electric starter
- Engine protection hood
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- Lockable engine cover and dash board
- Single point lifting device , foldable
- Extension plates (800mm)
- Battery disconnect switch
- Easy Service Concept
 - Diagnostic module with fault code display
 - Hour meter
 - foldable full protection hood
- 3-2-1 Warranty

Optional Equipment

- Special painting
- Combination remote control cable/radio
- Mobile quick charger
- Service Kit
- Tool kit
- US Version EPA 4 NRTC (10,6kW)
- TOUGH WARRANTY

Dimensions in mm

	H	L	L1	W	W1
BPH 80/65 S	785	1118	1088	650	800

Technical Data

Weights

Operating weight CECE (W)	kg	707
Operating weight CECE (W1)	kg	750
Basic weight	kg	745

Dimensions

Basic working width	mm	800
Lowest passing height	mm	785

Driving Characteristics

Working speed, max.	m/min	28
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Hatz
Type	1D 90 W
Emission stage	non EPA
Cooling	air
Number of cylinders	1
Performance ISO 3046	kW 10,9
Speed	min-1 3.000
Drive system	hydraulic
Fuel	diesel
Fuel comsump. aver. during operation	l/h 2,5

Exciter system

Frequency	Hz	55
Amplitude	mm	1,80
Centrifugal force	kN	80


Capacities

Fuel	l	10,0
Hydraulic	l	25,0

Technical modifications reserved. Machines may be shown with options.

BOMAG

BPH 80/65 S



PRE 700 15 010

110216 Sa

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

